

GRP_WM_S GRP_WM_L GRP261x IP Phones Series Wall Mount Bracket

Quick Installation Guide

Model	Compatible GRP261x phones
GRP_WM_S	GRP2612, GRP2612P, GRP2612W, GRP2613
GRP_WM_L	GRP2614, GRP2615, GRP2616

Grandstream Networks, Inc.

126 Brookline Ave, 3rd Floor Boston, MA 02215. USA Tel : +1 (617) 566 - 9300 Fax: +1 (617) 249 - 1987

www.grandstream.com



For Certification, Warranty and RMA information, please visit www.grandstream.com


EN OVERVIEW

This guide provides instructions for mounting your GRP261x series phone to the wall. Provided instructions apply to all GRP261x series models and all GRP_WM bracket models. There are two wall mount bracket models:

- GRP_WM_S for GRP2612/P/W and GRP2613
- GRP_WM_L for GRP2614, GRP2615 and GRP2616

Note: The wall mount bracket is sold separetely (not included in GRP261x series phone package).

PACKAGE CONTENTS




Note: Screws and anchors required for wall mount installation are not included in this package.

ADJUSTING HOOKSWITCH TAB


Make sure to adjust the hookswitch tab position up to hold the handset while the phone is mounted on the wall (tab wih extension down is recommeded for desktop usage).

- 1. Pull out the tab from the handset cradle.
- 2. Rotate the tab to extension up.
- 3. Plug it back into the slot with the extension up.

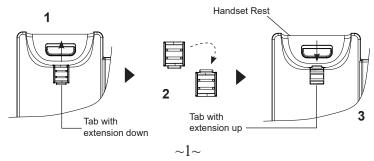


INSTALLING WALL MOUNT BRACKET

- 1. Put the wall mount's ribs into the unit's groove.
- 2. Press this position and install the wall mount.
- 3. The wall mount is installed completely.

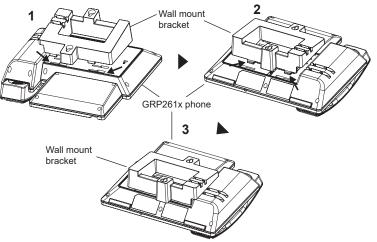

MOUNTING THE PHONE TO THE WALL

- 1. Use the wall mount bracket to mark two vertical dots using "wall mount slots" on the wall where the phone will be installed.
- Using a drill, make a hole on each marked dot. Put a plastic anchor and screw (not provided) on each hole. Leave enough space to attach the wall mount bracket to the wall.
- 3. Mount the GRP261x phone with wall mount bracket attached to the wall using wall mount slots.

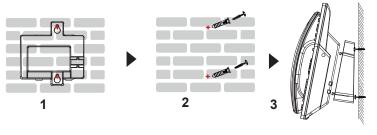

~2~