

## i55A&i55A-Z&i57A&i57A-Z

### Indoor Station Quick Installation Guide




**i55A&i55A-Z**



**i57A&i57A-Z**


## ① Package Contents



Indoor Unit



Quick Installation Guide



Wall-mount Bracket



10 pin Cable\*2



2 pin Cable\*1



Screw Fixing Seat\*5



TA4\*30mm  
Screw\*5



TM6#\*20mm  
Screw\*5



PM4\*16mm  
Screw\*3



## ② Physical specification

Model	Device Dimension
i55A&i55A-Z	217*124*21 (mm)
i57A&i57A-Z	295*181*24 (mm)


## ③ Product appearance description

### 1) Panel

#### a) i55A&i55A-Z

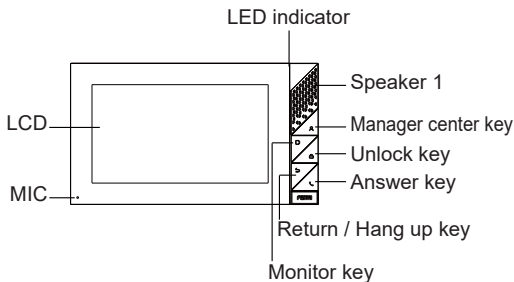


b) i57A&i57A-Z

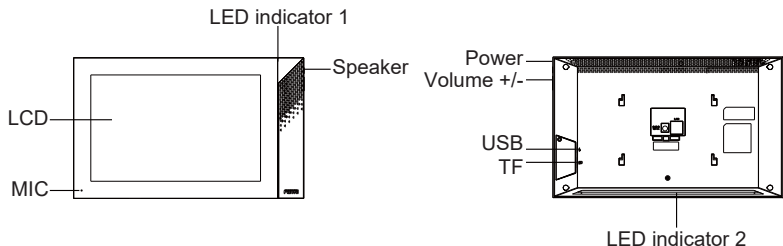

## 2) Interface description

There are some interfaces on the back of the device for connecting power supply, alarms etc.

The connections are as follows:




No.	Description	Interface
①	Power interface: 12V/1A input.	
②	Ethernet interface: standard RJ45 interface, 10/100M adaptive, it is recommended to use CAT5 or CAT5E network cable.	
③-1	2 sets of short-circuit output interfaces: corresponding to the short-circuit input interface, login device webpage settings, can be connected to electric locks, alarms etc.	<p>Logic</p>
③-2	1 sets of doorbell interfaces.	<p>DB</p>
③-3	1 sets of RS485 interfaces.	<p>RS485</p>
④	Power interface: 12V/1A input.	<p>DC</p>
⑤	8 sets of alarm input interfaces: input devices for connecting switches, infrared sensor, door sensor, vibration sensors etc.	<p>Alarm Input</p>

### 3) External device connection diagram



### 4 Installation Diagram

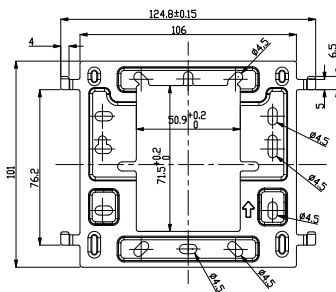

Wall bracket (DIM:mm)

#### Model 1: Wall-mounted Installation

(CN:86 embedded box,US: single gang&Dual gang, EUR:80 embedded box)

##### Step 1: Install wall bracket

###### Without 86 embedded box in the wall

- Mark two fixation holes positions on the wall with the wall bracket.
- Take down the bracket, using an electric drill to make the two fixation holes on the wall, then insert the two screw fixing seats provided.
- Fix the wall bracket on the wall with two TA4\*30 screws.

###### With 86 embedded box in the wall

- Fix the wall bracket on the 86 embedded box with two PM4\*16 screws.

##### Step 2: Connect peripherals

- If you need to connect other input and output devices, please connect to the host through the cable.

##### Step 3: Power on the device


If it is working properly, align the slot on the rear side of the panel with the pin on the wall bracket and slide the host down to complete the installation.

## 5 IP Indoor Unit Setting

### Step 1: Log in the web setting page of Indoor Unit

Input IP address of indoor unit (e.g. http:// 172.18.90.14) into the address bar of PC's web browser.

The default user name and password are both admin.

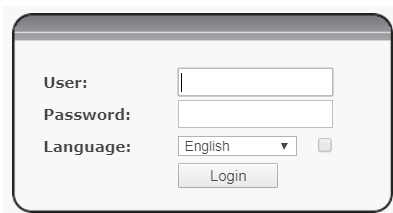

User:

Password:

Language: English

### Step 2: Add the SIP account

Set SIP server address, port, user name, password and SIP user with assigned SIP account parameters.

Select "Activate", and then click Apply to save this setting.



Line: 00000000

Registrar Settings >>

Line Status: Registered Activate:

Username: 0000 Authentication User: 1234

Display name: Authentication Password:

Realm: Server Name:

SIP Server 1: SIP Server 2:

Server Address: 192.16.1.2 Server Address:

Server Port: 5060 Server Port: 5060

Transport Protocol: SIP Transport Protocol: SIP

Registration Expiration: 3600 Registration Expiration: 3600

Proxy Server Address:  Backup Proxy Server Address:

Proxy Server Port: 5060 Backup Proxy Server Port: 5060

Proxy User:

Proxy Password:

Basic Settings >>

### Step 3: Feature Setting



Basic Settings >>

Enable Call Waiting:

Enable Auto on Hook:  Auto Message Defen: 0-255seconds

Enable Speed Dial:

Enable Default Line:  Enable Auto Switch Line:

Default Ext Line: 00000000 Search Path: 0

Enable SIP:  Enable Call Park:

Enable Restricted Incoming Call:  Enable Allowed Incoming Call:

Enable Restricted Outgoing Call:  Enable Country Code:

Country Code: 00 Area Code:

Enable Number Privacy:  Match Extension: None or in line

Start Number: 0-39 Hide Display: 0-255

Allow IP Call:  SIP IP Profile: 1

Caller Name Priority: Emergency Call Number Search Path: SIP

Search Path: SIP 1.x

Caller Display Type: Normal Park SIP Server:

Search Active (All) Source IP:  Enable Park Line:

## Step 4: Unlock Setting

Application—Doorphone Settings—Add—OK.


**Title:** Doorphone mode.

**Number:** The SIP account of Doorphone.

**Line:** The SIP line of Indoor Unit.



**Access codec:** Consistent with the access code in doorphone access table (The i57A-Z as calling party).

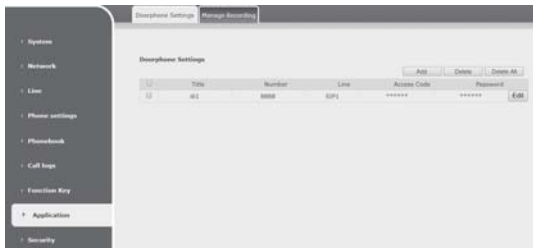**Password:** Same as open the doorphone's password (The i57A-Z as called party).



## 6 Local Operation



### 6.1 Answer/hang up calls

When the doorphone calls the indoor unit, click the  button to answer the call, and click the  button to hang up the call.

### 6.2 Unlock the door

During the call of indoor unit and doorphone, click the  button to unlock the door.

### 6.3 Turn on/off the monitoring

Click the  button on the indoor unit to check the monitoring screen, and click the  button to exit. (Only support for the communication with video doorphone)

### 6.4 Volume adjustment

When the indoor unit is talking to other devices like doorphone, click the  button to increase the volume, and click the  button to decrease the volume.

Fanvil Technology Co., Ltd

Website: [www.fanvil.com](http://www.fanvil.com)

Email: [sales@fanvil.com](mailto:sales@fanvil.com) [support@fanvil.com](mailto:support@fanvil.com)

Tel: +86-755-2640-2199 Fax: +86-755-2640-2618

Add: 10/F Block A, Dualshine Global Science Innovation Center,  
Hongliang North 2nd Road, Bao'an District, Shenzhen, China